

Teammachine SLR01/02 Seatpost Clamp and Seatpost Installation

1. **Seatpost clamp:** Before installing the seatpost clamp

- a apply grease to the sliding surfaces between the two wedges
- b apply grease to the M5 bolt, washer and nut
- c do not apply any grease to the contact surface of the clamp to the seatpost


2. **Seatpost:** Before installing the seatpost

- a push the cover into place
- b apply friction paste to the side and rear of the seatpost
- c do not apply any grease or friction paste to the grip tape on the front of the seatpost


Install seatpost and tighten the clamp to max. **5Nm**



1a

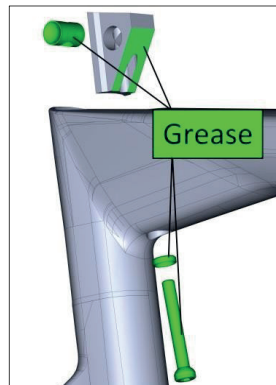

1a/b

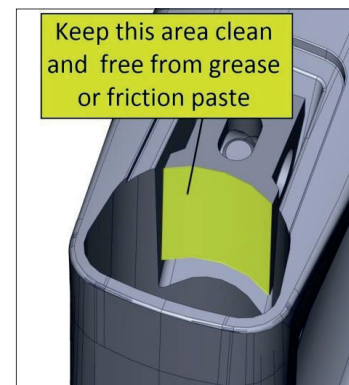

1c



2a



2b



2c